




F480 WELL CASING

MEETS ASTM D1784 AND F480, AND ANSI/NSF STANDARD 61.



APPLICATIONS

JM Eagle F480 Well Casing is suitable for conveying water and other fluids in domestic, municipal, industrial and dewatering applications.

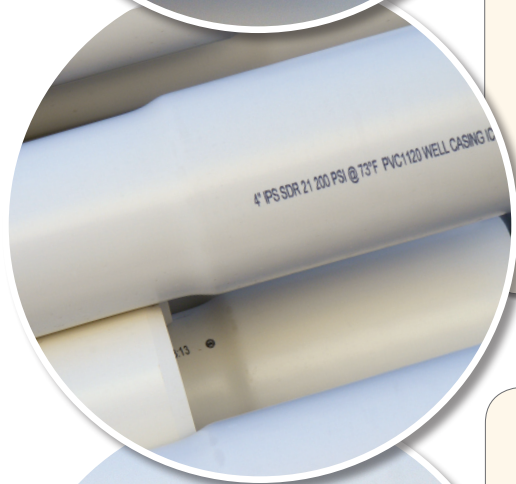

DESCRIPTION

JM Eagle F480 Well Casing is available in Schedule 40 2- through 12-inch diameters and SDR 32.5, 26, 21 and 17.

A solvent weld product, it is manufactured from the highest quality PVC compound and comes in 20-foot lengths.

It may be dual marked as pressure pipe.



BENEFITS

JM Eagle F480 Well Casing is lightweight, cost-effective and long-lasting.

- It can be field-cut with a power saw or ordinary handsaw without the use of expensive or complicated machinery.
- Easy to load, transport and handle, installers prefer it because it goes into the ground quickly, saving installation costs.
- A cured joint of JM Eagle solvent weld well casing offers a zero-leak joint that is structurally sound.




F480 WELL CASING

SUBMITTAL AND DATA SHEET

*ANSI/NSF 61-14

	NOMINAL PIPE (IN)	AVERAGE O.D. (IN)	APPROX. I.D. (IN)	MIN. T. (IN)	APPROX. WEIGHT (LBS/100')
SDR 32.5	4	4.500	4.20	0.138	130
	5	5.563	5.179	0.171	192
	6	6.625	6.18	0.204	270
	8	8.625	8.05	0.265	460
SDR 26	4	4.500	4.13	0.173	160
	4½	4.950	4.54	0.190	190
	5	5.563	5.10	0.214	240
	6	6.625	6.07	0.255	330
	8	8.625	7.91	0.332	590
	10	10.750	9.86	0.413	910
SDR 21	12	12.750	11.70	0.490	1280
	4	4.500	4.04	0.214	190
	4½	4.950	4.44	0.236	240
	5	5.563	4.99	0.265	300
	6	6.625	5.94	0.316	410
	8	8.625	7.74	0.410	690
	10	10.750	9.65	0.511	1110
	12	12.750	11.45	0.606	1570
SDR 17	4	4.500	3.906	0.265	234
	4½	4.950	4.32	0.291	290
	5	5.563	4.86	0.327	360
	6	6.625	5.79	0.390	520
Schedule 40	2	2.375	2.027	0.154	71
	4	4.500	3.99	0.237	210
	4½	4.950	4.41	0.248	250
	5	5.563	5.01	0.258	290
	6	6.625	6.02	0.280	370
	8	8.625	7.93	0.322	590
	10	10.750	9.96	0.365	780
	12	12.750	11.88	0.406	1030

Prior to ordering or specifying, please consult JM Eagle™ for product and/or listing availability.

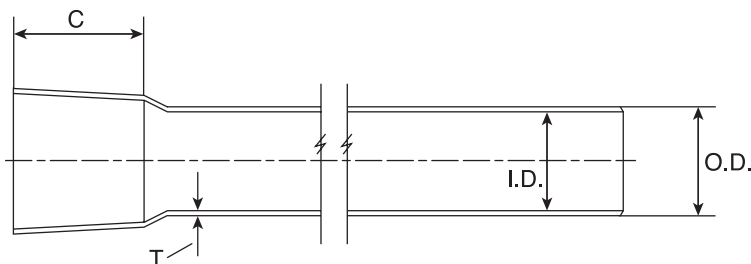

I.D. : Inside Diameter
 O.D. : Outside Diameter
 T : Wall Thickness
 C : Bell Length in inches
 Nominal 20-foot laying length
 All lengths are 20 feet plus depths of bell.

WELL CASING

SUBMITTAL AND DATA SHEET

*ANSI/NSF 61-14

	NOMINAL PIPE (IN)	AVERAGE O.D. (IN)	APPROX. I.D. (IN)	MIN. T. (IN)	APPROX. WEIGHT (LBS/100')
SDR 32.5	4	4.500	4.20	0.138	130
	5	5.563	5.179	0.171	192
	6	6.625	6.18	0.204	270
	8	8.625	8.05	0.265	460
SDR 26	4	4.500	4.13	0.173	160
	4 1/2	4.950	4.54	0.190	190
	5	5.563	5.10	0.214	240
	6	6.625	6.07	0.255	330
	8	8.625	7.91	0.332	590
	10	10.750	9.86	0.413	910
	12	12.750	11.70	0.490	1280
SDR 21	4	4.500	4.04	0.214	190
	4 1/2	4.950	4.44	0.236	240
	5	5.563	4.99	0.265	300
	6	6.625	5.94	0.316	410
	8	8.625	7.74	0.410	690
	10	10.750	9.65	0.511	1110
	12	12.750	11.45	0.606	1570
SDR 17	4	4.500	3.906	0.265	234
	4 1/2	4.950	4.32	0.291	290
	5	5.563	4.86	0.327	360
	6	6.625	5.79	0.390	520
Schedule 40	2	2.375	2.027	0.154	71
	4	4.500	3.99	0.237	210
	4 1/2	4.950	4.41	0.248	250
	5	5.563	5.01	0.258	290
	6	6.625	6.02	0.280	370
	8	8.625	7.93	0.322	590
	10	10.750	9.96	0.365	780
	12	12.750	11.88	0.406	1030

* Prior to ordering or specifying, please consult JM Eagle™ for product and/or listing availability.

Product Standard: ASTM F480
 Pipe Compound: ASTM D1784 Cells Class 12454
 Certifications: ANSI/NSF Standard 61
 End Finish: Belled End
 Pipe Length: 20 feet laying length
 Installation: JM Eagle™ Installation Guide