




BLUE BRUTE™

MEETS AWWA C900 AND ASTM D1784 CELL CLASS 12454;
GASKETS MEET ASTM F477; JOINTS MEET ASTM D3139.

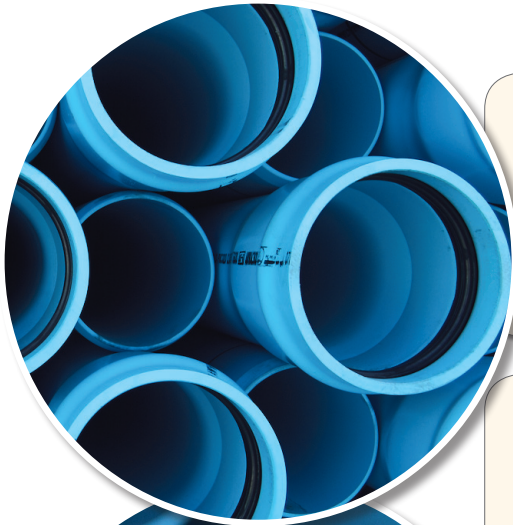

APPLICATIONS

JM Eagle's Blue Brute C900 pipe is suitable for use in distribution pipelines of potable water, as well as gravity sewer, force main and water reclamation projects.




DESCRIPTION

JM Eagle Blue Brute C900 is available in 4- through 12-inch diameters, in blue, white, purple and green. It comes in standard laying lengths of 20 feet.

One length of 8-inch DR 18 pipe weighs approximately 184 pounds.

The pipe conforms to AWWA C900 pressure class 165 psi (DR 25), 235 psi (DR 18) and 305 psi (DR 14). It carries approval of ANSI/NSF Standard 61, UL 1285 and FM 1612 (DR 18 and DR 14 only).

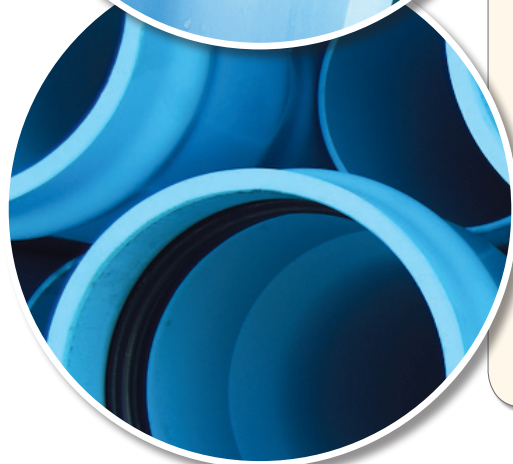

BENEFITS

JM Eagle Blue Brute C900 pipe is the safe, long-lasting and stable solution for a modern infrastructure. Blue Brute:

- Maintains performance against tuberculation, corrosion and external galvanic soil conditions without lining wrapping, coating or cathodic protection.
- Keeps its smooth interior over long years of service with virtually no loss in carrying capacity, allowing for savings in pumping costs, as well as savings on the size of the pipe required.
- Can be field-cut with a power saw or ordinary handsaw and beveled without the use of expensive or complicated machinery.



BLUE BRUTE™

SUBMITTAL AND DATA SHEET




PIPE SIZE (IN)	AVERAGE O.D. (IN)	NOM. I.D. (IN)	MIN. T. (IN)	MIN. E (IN)	APPROX. D ⁹ (IN)	APPROX. WEIGHT (LBS/FT)
PRESSURE CLASS 165 psi (DR 25)						
4	4.80	4.39	0.192	5.25	5.57	1.9
6	6.90	6.31	0.276	6.40	8.00	3.9
8	9.05	8.28	0.362	7.05	10.50	6.7
10	11.10	10.16	0.444	8.20	12.88	10.1
12	13.20	12.08	0.528	8.80	15.31	14.4
PRESSURE CLASS 235 psi (DR 18)*						
4	4.80	4.23	0.267	5.25	5.87	2.6
6	6.90	6.09	0.383	6.40	8.43	5.3
8	9.05	7.98	0.503	7.05	11.06	9.2
10	11.10	9.79	0.617	8.20	13.57	13.9
12	13.20	11.65	0.733	8.80	16.13	19.7
PRESSURE CLASS 305 psi (DR 14)*						
4	4.80	4.07	0.343	5.25	6.17	3.2
6	6.90	5.86	0.493	6.40	8.87	6.7
8	9.05	7.68	0.646	7.05	11.63	11.6
10	11.10	9.42	0.793	8.20	14.27	17.6
12	13.20	11.20	0.943	8.80	16.97	25.1

Consult JM Eagle™ for CSA and other listing availability prior to shipment.

Note: *FM Approvals Pressure Class 150 psi for DR 18 and 200 psi for DR 14.

* Contact your JM eagle™ sales representative for location availability.

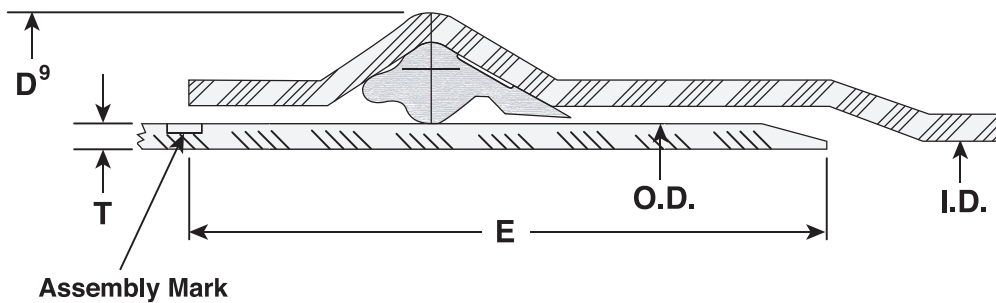

I.D. : Inside Diameter
 O.D. : Outside Diameter
 T. : Wall Thickness
 D⁹ : Bell Outside Diameter
 E : Distance between Assembly Mark to the end of spigot.

Product Standard: ANSI/AWWA C900
 Pipe Compound: ASTM D1784 Cells Class 12454
 Gasket: ASTM F477
 Integral Bell Joint: ASTM D3139

Certifications: ANSI/NSF Standard 61
 UL Standard 1285
 Pipe Length: 20 feet laying length
 Installation: AWWA C605
 JM Eagle™ Installation Guide