



EAGLE CORR PE™

SINGLE WALL

MEETS AASHTO M252 TYPE C.



APPLICATIONS

JM Eagle's Eagle Corr PE Single Wall pipe is suitable for use in road and highway underdrains, as well as golf course, turf field, agricultural, and home and landscape drainage applications.



DESCRIPTION

JM Eagle's Eagle Corr PE Single Wall pipe is available in 4- and 6-inch diameters in a wide range of lengths, from 10- and 20-foot sticks to 3,000-foot maxi coils.

A full line of soil-tight fittings are available for Eagle Corr PE Single Wall upon request. Custom lengths are also available (100-foot and 250-foot coils).



BENEFITS

JM Eagle's Eagle Corr PE Single Wall is better engineered for a more durable joint and long-lasting performance. Eagle Corr PE Single Wall:

- Is made from HDPE, one of the most chemically inert plastics, and is extremely resistant to corrosion, as well as abrasion, gouging and scratching.
- Is expected to significantly exceed 100 years of design service life.
- Saves money on installation costs due to its long laying lengths and light weight for easier handling and transport.





EAGLE CORR PE™

SINGLE WALL

SUBMITTAL AND DATA SHEET

THIS SPECIFICATION REFERS TO 4" AND 6" PIPE FOR USE IN GRAVITY FLOW DRAINAGE APPLICATIONS.

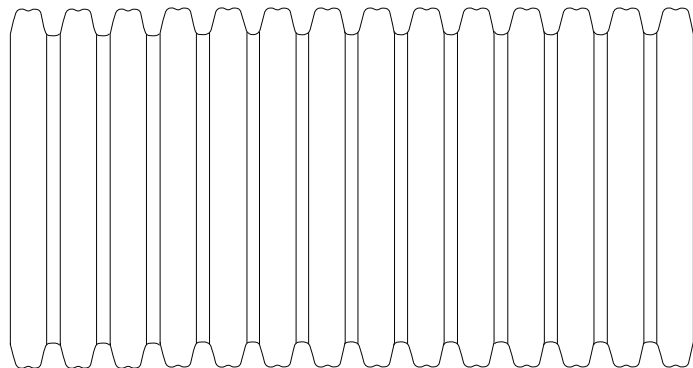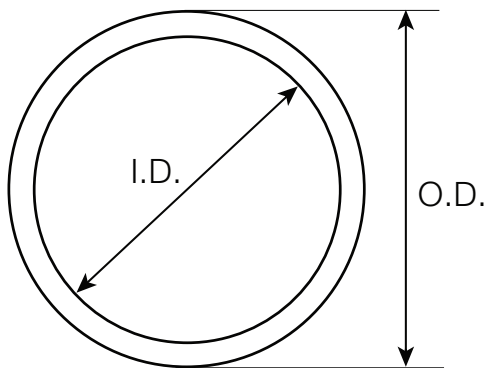

NOMINAL I.D. IN (MM)	APPROX. O.D. IN (MM)	LAYING LENGTH (FT)	PIPE STIFFNESS PSI	AVERAGE UNIT WEIGHT LB/FT
4 (100)	5 (120)	100/250/3000	35	0.35
6 (150)	7 (174)	100/1400	35	0.90

PRODUCT STANDARD: AASHTO M252 Type C
 PIPE COMPOUND: ASTM D3350
 FITTINGS: AASHTO M252
 INSTALLATION: ASTM D2321; Eagle Corr PE Installation Guide