


ULTRA BLUE™

SUBMITTAL AND DATA SHEET

PIPE SIZE (IN)	APPROX. BELL O.D. (IN)	AVERAGE O.D. (IN)	MIN. T. (IN)	APPROX. AVERAGE ID (IN)	STOP LINE DISTANCE MIN. E (IN)	APPROX. WEIGHT (LBS/FT)	APPROX. WEIGHT (LBS/JNT)
Pressure Class 305**							
6	8.750	6.90	0.284	6.30	5 3/4	4.06	81
8	11.075	9.05	0.373	8.26	6 1/2	7.56	155

** 6"-8" PC 305 - NSF 61/14 (pw) listed
- Check for availability Class 305

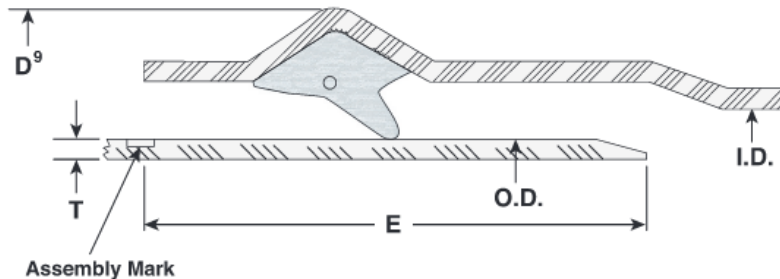

I.D. : Inside Diameter
O.D. : Outside Diameter
T. : Wall Thickness
 D° : Bell Outside Diameter
E : Distance between Assembly Mark to the end of spigot.

Product Standard: ANSI/AWWA C909
UL1285 6"-12" PC 235
Pipe Compound: ASTM D1784 Cells Class 12454
Gasket: ASTM F477
Integral Bell Joint: ASTM D3139
Certifications: ANSI/NSF Standard 61
UL1285 6"-12" PC 235
Pipe Length: 20 feet (+/- 1") laying length
Installation: AWWA C605
JM Eagle™ Installation Guide