

IPS Pressure | Ring-Tite

PRESSURE-RATED PVC PIPE



MADE IN AMERICA



ASTM D2241,
ASTM D1784 Cell Class 12454,
ANSI/NSF 61/14, Uniform Plumbing Code

GASKETS: ASTM F477

JOINTS: ASTM D3139

MARKETS



POTABLE



IRRIGATION



RECLAIM



SEWER



PLUMBING

DESCRIPTION



IPS PRESSURE - RING TITE

Nominal Laying Length:

20/22 feet

(Laying length tolerances are in accordance with ASTM standards)

PIPE SIZES

1½", 2", 2½", 3", 4", 5",
6", 8", 10", 12"

PIPE COLOR

BLUE

GREEN

PURPLE


WHITE

RING-TITE JOINT

Flexible elastomeric Rieber® locked-in gasket provides a tight seal that protects and compensates for expansion, contraction, vibration, or other movements.

Quick and easy to assemble with a simple push, there's no field mixing or application of cement.

Meets or exceeds ASTM D3139 for joint tightness, including a 22-inchHg vacuum and a 25-foot head pressure test.



• Rieber® sealing ring provides tight, flexible seal.

• Spigot pipe ends are supplied from the factory with bevels.

• The bell is an integral part of the pipe length with the same strength.

ASTM D2241

63 psi	SDR 64
100 psi	SDR 41
125 psi	SDR 32.5
160 psi	SDR 26
200 psi	SDR 21
250 psi	SDR 17

BENEFITS

INSTALLATION

- Lightweight, great for manual installation.
- Field-cut with a power saw or handsaw; bevel without complicated machinery.
- Does not need lining, wrapping, coating, or cathodic protection to prevent galvanic corrosion.

FEATURES

- Unaffected by corrosive elements: sewer gas, sulfuric acid, alkaline, or acidic soils.
- Consistency in carrying capacity (flow coefficient, C=150), for savings in pumping and material costs.



SUBMITTAL AND DATA SHEET

PIPE SIZE (IN)	AVG. O.D. (IN)	NOM. I.D. (IN)	MIN. T. (IN)	AVG. E. (IN)	APPROX. D ³	APPROX. WGT (LBS/FT)
PRESSURE CLASS: 250 psi (SDR 17)						
1½	1.900	1.641	0.112	3.575	2.39	0.416
2	2.375	2.078	0.140	3.825	2.94	0.652
3	3.500	3.063	0.206	4.325	4.32	1.416
4	4.500	3.938	0.265	4.625	5.56	2.350
6	6.625	5.603	0.390	5.325	8.19	5.097
8	8.625	7.553	0.508	6.025	10.66	8.668
10	10.750	9.410	0.632	6.825	13.28	13.514
12	12.750	11.160	0.750	8.225	15.75	19.147
PRESSURE CLASS: 200 psi (SDR 21)						
1½	1.900	1.709	0.090	3.575	2.26	0.339
2	2.375	2.135	0.113	3.825	2.83	0.527
2½	2.875	2.585	0.137	4.075	3.42	0.781
3	3.500	3.146	0.167	4.325	4.17	1.155
4	4.500	4.046	0.214	4.625	5.36	1.904
6	6.625	5.955	0.316	5.325	7.89	4.161
8	8.625	7.754	0.410	6.025	10.27	7.090
10	10.750	9.667	0.511	6.825	12.79	10.964
12	12.750	11.465	0.606	8.225	15.17	15.525
PRESSURE CLASS: 160 psi (SDR 26)						
1½	1.900	1.745	0.073	3.575	2.19	0.277
2	2.375	2.182	0.091	3.825	2.74	0.429
2½	2.875	2.642	0.110	4.075	3.32	0.634
3	3.500	3.214	0.135	4.325	4.04	0.948
4	4.500	4.133	0.173	4.625	5.19	1.554
6	6.625	6.084	0.225	5.325	7.65	3.376
8	8.625	7.921	0.332	6.025	9.95	5.739
10	10.750	9.874	0.413	6.825	12.40	8.984
12	12.750	11.711	0.490	8.225	14.71	12.673

SUBMITTAL AND DATA SHEET

PIPE SIZE (IN)	AVG. O.D. (IN)	NOM. I.D. (IN)	MIN. T. (IN)	AVG. E. (IN)	APPROX. D ⁹	APPROX. WGT (LBS/FT)
PRESSURE CLASS: 125 psi (SDR 32.5)						
2	2.374	2.220	0.073	3.825	2.67	0.350
2½	2.875	2.688	0.088	4.075	3.23	0.511
3	3.500	3.271	0.108	4.325	3.93	0.764
4	4.500	4.207	0.138	4.625	5.05	1.249
6	6.625	6.193	0.204	5.325	7.44	2.749
8	8.625	8.063	0.265	6.025	9.69	4.664
10	10.750	10.048	0.331	6.825	12.07	7.298
12	12.750	11.919	0.392	8.225	14.32	10.320
PRESSURE CLASS: 100 psi (SDR 41)						
4	4.500	4.267	0.110	4.625	4.94	1.011
6	6.625	6.282	0.162	5.325	7.27	2.197
8	8.625	8.180	0.210	6.025	9.47	3.717
10	10.750	10.195	0.262	6.825	11.80	5.811
12	12.750x	12.091	0.311	8.225	13.99	8.236
PRESSURE CLASS: 63 psi (SDR 64)						
8	8.625	8.33	0.135	6.025	9.30	2.399
10	10.750	10.39	0.168	6.825	11.50	3.761
12	12.750	12.32	0.199	8.225	13.80	5.317

IPS Pressure | Ring-Tite

PRESSURE-RATED PVC PIPE



SUBMITTAL AND DATA SHEET

PRODUCT STANDARD

ASTM D2241

GASKET

ASTM F477

CERTIFICATIONS

ANSI/NSF 61, ANSI/NSF 14,
Uniform Plumbing Code

PIPE COMPOUND

ASTM D1784 Cell Class 12454

INTEGRAL BELL JOINT

ASTM D3139

NOMINAL LAYING LENGTH

20/22 feet


(Laying length tolerances are in accordance with ASTM standards.)

Manning Coefficient (n) = 0.009 - Hazen-Williams Coefficient (c) = 150

Supply may vary based on plant location.
Please call regarding availability.

INSTALLATION

JM Eagle™ IPS Pressure Installation Guide

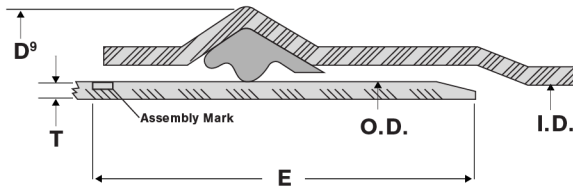

**SCAN HERE FOR
THE IRRIGATION IPS PRESSURE
INSTALLATION GUIDE**

I.D. - Inside Diameter

E - Distance between
Assembly Marks and
the end of the spigot.

T - Minimum Wall
Thickness

D⁹ - Bell Outside Diameter

O.D. - Outside Diameter

