

Well Casing | JM WellLoc™

SPLINE
LOCKING



MADE IN AMERICA



ASTM F480, ASTM D1784 Cell Class 12454,
ANSI/NSF 61/14, Uniform Plumbing Code

MARKETS



WELL



DRAINAGE

DESCRIPTION



WELL CASING JM WellLoc™ SPLINE LOCKING

Nominal Laying Length:

20 feet

(Laying length tolerances are in accordance
with ASTM standards)

PIPE SIZES

IPS:

4", 4½", 5", 6"

PIPE COLOR


WHITE

ASTM F480

SDR 21

SDR 17

Schedule 40

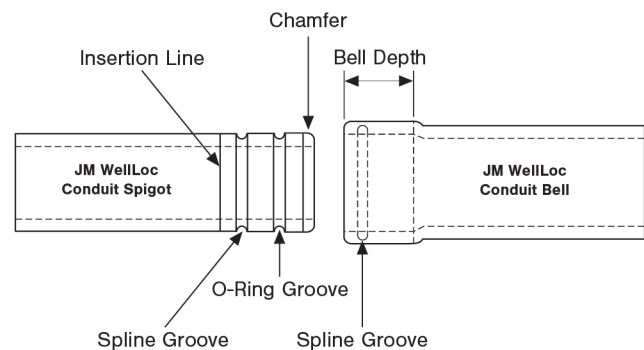

BENEFITS

INSTALLATION

- Lightweight, economical and easy to install.
- Does not need lining, wrapping, coating, or cathodic protection to prevent galvanic corrosion.
- The chamfered spigot end makes for easy assembly and disassembly for reuse.

FEATURES

- Corrosion-free and unaffected by corrosive elements such as acidic soils.
- Consistency in carrying capacity (flow coefficient, C=150), for savings for pumping and material costs.



SUBMITTAL AND DATA SHEET

PIPE SIZE (IN)	AVG. O.D. (IN)	APPROX. I.D. (IN)	MIN. T. (IN)	APPROX. WT/ FT
SDR 21				
5	5.563	5.00	0.265	2.961
6	6.625	5.96	0.316	4.101
SDR 17				
4½	4.950	4.34	0.291	2.859
5	5.563	4.87	0.327	3.611
6	6.625	5.80	0.390	5.129
SCHEDULE 40				
4	4.500	4.00	0.237	2.078
4½	4.950	4.43	0.248	2.459
4½	4.950	4.43	0.248	2.459

PRODUCT STANDARD

ASTM F480

CERTIFICATION

ANSI/NSF 61, ANSI/NSF 14,
Uniform Plumbing Code

NOMINAL LAYING LENGTH

20 feet

(Laying length tolerances are
in accordance with ASTM standards)

Manning Coefficient (n) = 0.009
Hazen-Williams Coefficient (c) = 150


Supply may vary based on plant location.
Please call regarding availability.

INSTALLATION

JM Eagle™
Well Casing/JM WellLoc™
Installation Guide.

PIPE COMPOUND

ASTM D1784
Cell Class 12454

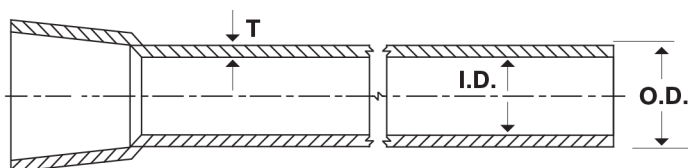

**SCAN HERE FOR
THE WELL CASING
INSTALLATION GUIDE**

T - Wall Thickness

I.D. - Inside Diameter

O.D. - Outside Diameter

