



Building essentials
for a better tomorrow™




BLUE BRUTE™

SUBMITTAL AND DATA SHEET

PIPE SIZE (IN)	AVERAGE O.D. (IN)	NOM. I.D. (IN)	MIN. T. (IN)	MIN. E (IN)	APPROX. D ⁹ (IN)	APPROX. WEIGHT (LBS/FT)
PRESSURE CLASS 165 psi (DR 25)						
4	4.80	4.39	0.192	5.25	5.57	1.9
6	6.90	6.31	0.276	6.40	8.00	3.9
8	9.05	8.28	0.362	7.05	10.50	6.7
10	11.10	10.16	0.444	8.20	12.88	10.1
12	13.20	12.08	0.528	8.80	15.31	14.4
PRESSURE CLASS 235 psi (DR 18)*						
4	4.80	4.23	0.267	5.25	5.87	2.6
6	6.90	6.09	0.383	6.40	8.43	5.3
8	9.05	7.98	0.503	7.05	11.06	9.2
10	11.10	9.79	0.617	8.20	13.57	13.9
12	13.20	11.65	0.733	8.80	16.13	19.7
PRESSURE CLASS 305 psi (DR 14)*						
4	4.80	4.07	0.343	5.25	6.17	3.2
6	6.90	5.86	0.493	6.40	8.87	6.7
8	9.05	7.68	0.646	7.05	11.63	11.6
10	11.10	9.42	0.793	8.20	14.27	17.6
12	13.20	11.20	0.943	8.80	16.97	25.1

Consult JM Eagle™ for CSA and other listing availability prior to shipment.

Note: *FM Approvals Pressure Class 150 psi for DR 18 and 200 psi for DR 14.

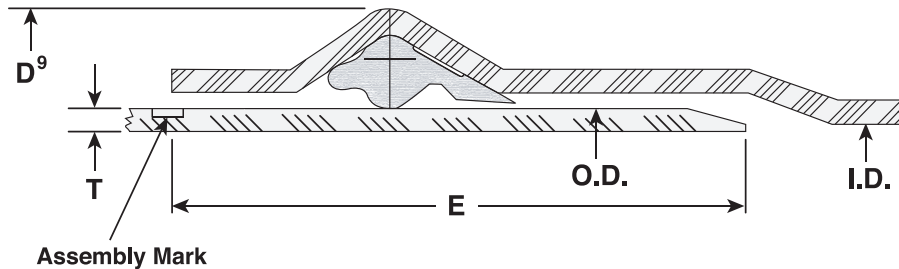

I.D. : Inside Diameter
 O.D. : Outside Diameter
 T. : Wall Thickness
 D⁹ : Bell Outside Diameter
 E : Distance between Assembly Mark to the end of spigot.

Product Standard: ANSI/AWWA C900
 Pipe Compound: ASTM D1784 Cells Class 12454 ASTM
 Gasket: F477
 Integral Bell Joint: ASTM D3139
 Certifications: ANSI/NSF Standard 61
 UL Standard 1285
 Pipe Length: 20 feet (+/- 1") laying length
 Installation: AWWA C605
 JM Eagle™ Installation Guide